

PALOMAT® Double Up

Fully automatic stacking and destacking




Insert or remove the pallets using a hand pallet truck, electric stacker, or a forklift truck. The PALOMAT® Double Up detects the pallets via photo sensors after which they are automatically stacked or destacked 1+1 pallet in a line at floor level.

one by one, after which the pallets are automatically stacked to no more than 2x15 pallets. The entire stack can subsequently be removed.

PALOMAT® Double Up is only operated manually using the touch panel to change between stacking and destacking.

When selecting destacking, a stack of no more than 2x15 pallets will be inserted in the PALOMAT®, after which the pallets are automatically destacked one by one. When selecting stacking, the pallets are inserted

Please notice that the PALOMAT® Double Up only handles 1+1 pallet two in a line - not pallets one by one. This applies for stacking as well as destacking.

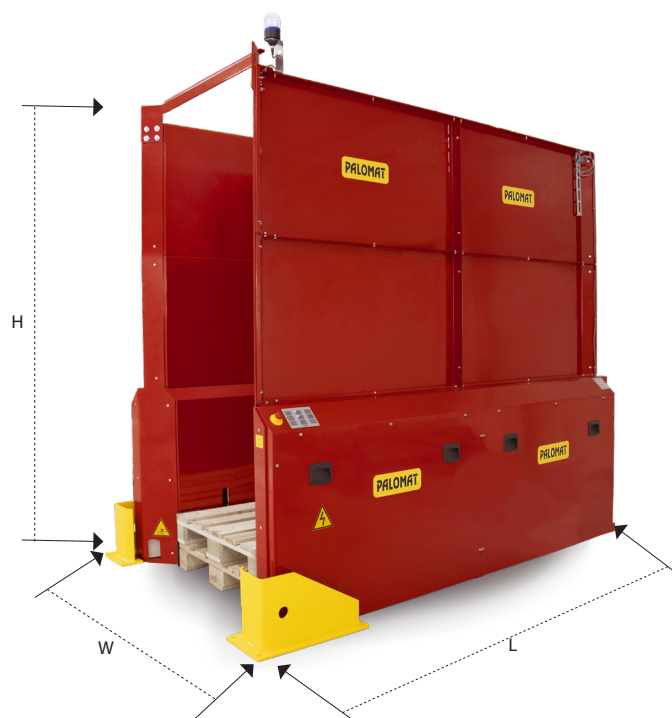

Your benefits with PALOMAT®

- › Space saving and a tidy workplace
- › Optimised pallet flow
- › Improved work environment
- › Reduced pallet costs
- › Increased efficiency
- › No manual pallet handling
- › Less absence due to illness
- › Reduced time spent per pallet
- › Fewer back injuries, jammed fingers, and feet
- › Less truck driving
- › LEAN- increased efficiency with less resources
- › "Plug and Play" solution



Models				
Article no.	Machine dimensions L x W x H (mm)	Pallet size L x W x H (mm)	Lifting capacity (kg)	No. of pallets
152501*	2720x1340x2350	2x1200x800x144	2x500	2x15

* Incl. safety frame for 2x15 pallets, top bar, light tower incl. maximum indicator and truck protection

Technical
Power source
220-240V AC, 50 Hz

Control: Siemens S7-1200
Actuator: Linak



Standard colours: RAL 3002 red, RAL 5002 blue, RAL 7032 grey and RAL 7035 grey

You can read more about PALOMAT® Double Up, options, technical data etc. on www.palomat.com